




Best warranty
in the industry

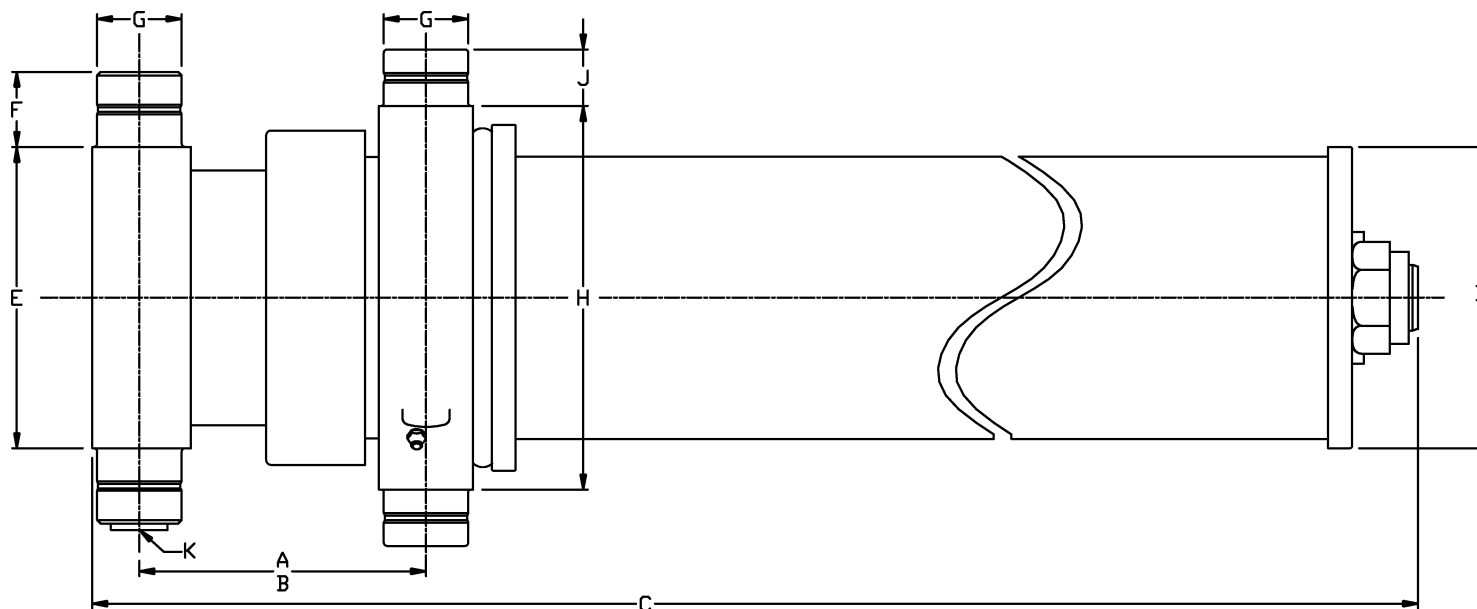

Model - Part Number	A (stroke) [in]	B (closed) [in]	C (overall) [in]	D [in]	E [in]	F [in]	G [in]	H [in]	J [in]	K [SAE]	Working pressure [psi]	Oil volume [gal (US)]	Weight [lb]
M 2-3/4" MODEL													
M 70-2.75-2 - PM0270702VM0420	70	5-7/8	44-13/16	4-5/8	4	2	1-1/4	5-3/8	1-1/4	6	2000	1.4	107
M 83-2.75-3 - PM0270833VM0419	82-7/8	5-7/8	38-3/16	4-5/8	4	2	1-1/4	5-3/8	1-1/4	6	2000	1.2	91
M 3-1/2" MODEL													
M 80-3.5-3 - PM0350803VM0425	80-1/8	5-1/2	38-5/16	5-1/4	4-3/4	2	1-7/8	6-3/4	1-1/4	10	2000	2	134
M 90-3.5-3 - PM0350903VM0418	90	5-1/2	44-13/16	5-1/4	4-3/4	2	1-7/8	6-3/4	1-1/4	10	2000	2.4	155
M 100-3.5-3 - PM0351003VM0417	99-5/8	5-1/2	44-13/16	5-1/4	4-3/4	2	1-7/8	6-3/4	1-1/4	10	2000	2.5	152
M 110-3.5-3 - PM0351103VM0416	109-1/2	5-1/2	51-5/16	5-1/4	4-3/4	2	1-7/8	6-3/4	1-1/4	10	2000	2.8	173
M 120-3.5-3 - PM0351203VM0415	119-1/8	5-1/2	51-5/16	5-1/4	4-3/4	2	1-7/8	6-3/4	1-1/4	10	2000	2.9	171
M 4-1/2" MODEL													
M 80-4.5-3 - PM0450803VM0458	81-3/16	5-1/4	45-1/2	6-1/4	5-3/4	2	1-7/8	8	1-1/4	12	2000	4	233
M 90-4.5-2 - PM0450902VM0426	88	6-3/16	56-1/2	6-1/4	5-3/4	2	1-7/8	8	1-1/4	12	2000	4.8	231
M 90-4.5-3 - PM0450903VM0414	91-1/8	5-1/4	45-1/2	6-1/4	5-3/4	2	1-7/8	8	1-1/4	12	2000	4.2	230
M 100-4.5-3 - PM0451003VM0413	97-7/8	5-1/4	45-1/2	6-1/4	5-3/4	2	1-7/8	8	1-1/4	12	2000	4.3	227
M 110-4.5-3 - PM0451103VM0412	112-3/4	5-1/2	52-3/4	6-1/4	5-3/4	2	1-7/8	8	1-1/4	12	2000	5.1	260
M 120-4.5-3 - PM0451203VM0411	119-1/2	5-1/2	52-3/4	6-1/4	5-3/4	2	1-7/8	8	1-1/4	12	2000	5.3	258
M 135-4.5-3 - PM0451353VM0410	134-7/8	5-1/2	62-3/8	6-1/4	5-3/4	2	1-7/8	8	1-1/4	12	2000	6.2	304
M 150-4.5-3 - PM0451503VM0409	148-3/8	5-1/2	62-3/8	6-1/4	5-3/4	2	1-7/8	8	1-1/4	12	2000	6.5	299

Subject to change without notice

MA1216P