


G3 TELESCOPIC CYLINDER

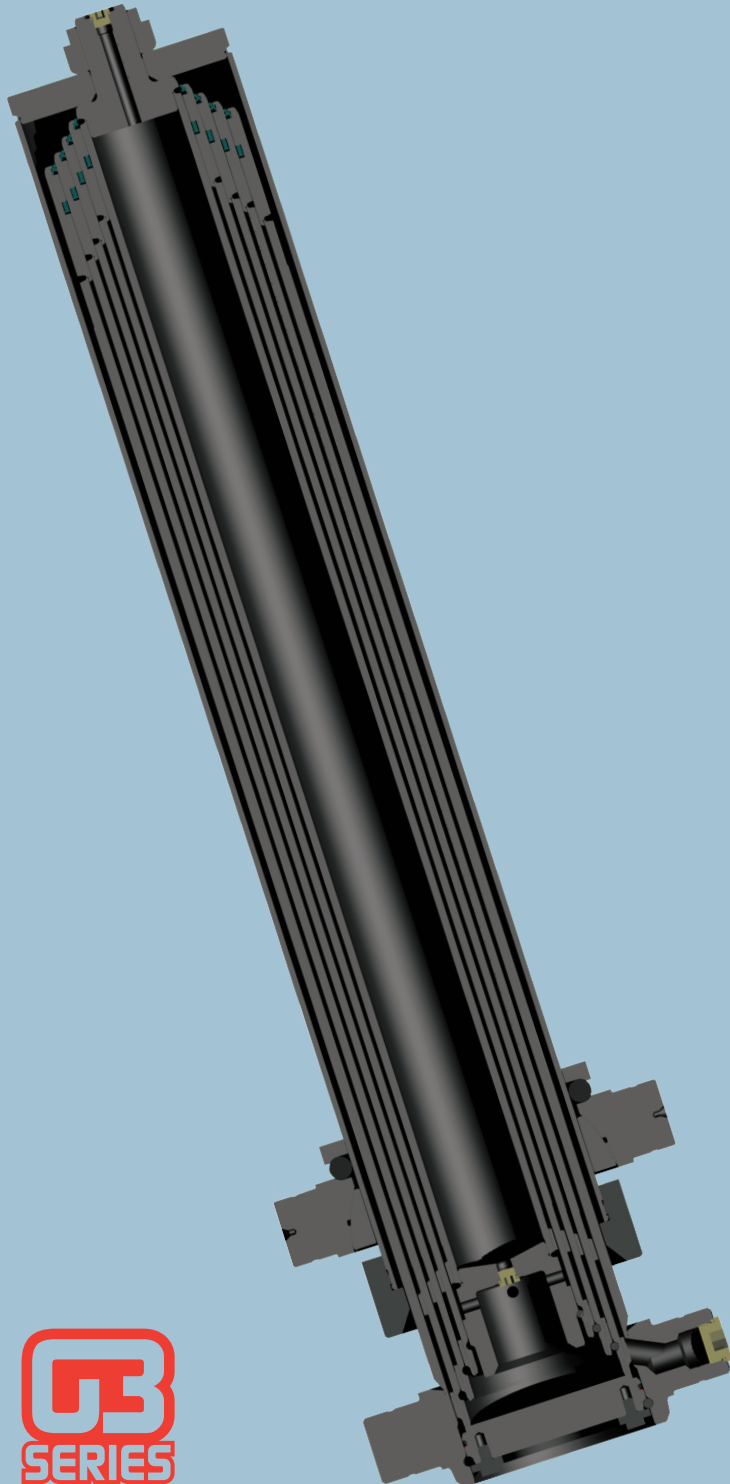

MAILHOT
INDUSTRIES

SINCE 1956

IMPROVED PERFORMANCE

HIGHER LIFTING CAPACITY

FASTER CYCLE TIME

LIGHTER

USES LESS OIL

HIGH PRESSURE CYLINDER

IMPROVED RELIABILITY


100% SALT BATH
NITRIDED

50% LESS COMPONENTS

WEAR AND
CORROSION RESISTANT



Best warranty
in the industry

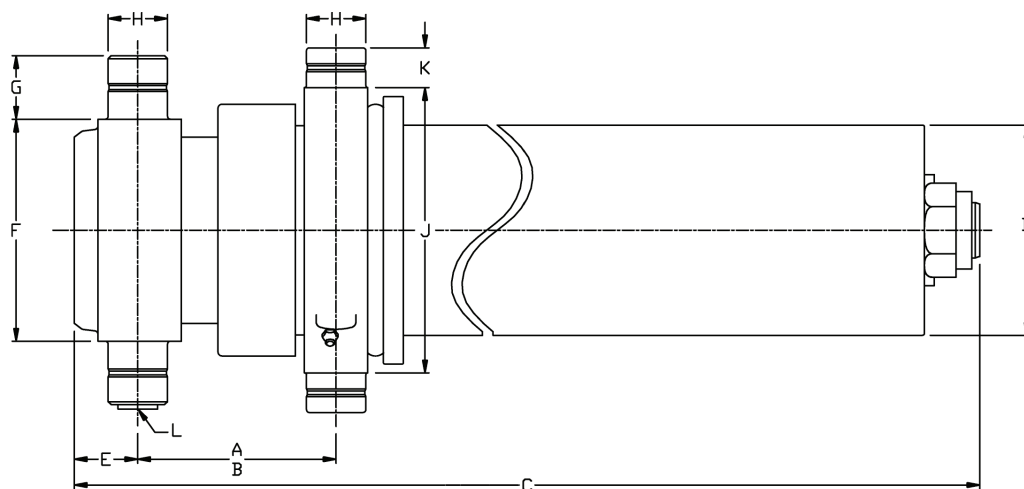

Best warranty
in the industry

Model - Part Number	A (stroke) [in]	B (closed) [in]	C (overall) [in]	D [in]	E [in]	F [in]	G [in]	H [in]	J [in]	K [in]	L [SAE]	Working pressure [psi]	Oil volume [gal (US)]	Weight [lb]
G3 - 5" MODEL (replaces M 5-1/2")														
G3 100-5-3 - PG0501003VM0172	100	6-1/4	56-7/8	6-5/8	2	7	2	1-7/8	9	1-1/4	12	2750	7.8	336
G3 110-5-3 - PG0501103VM0142	110	6-1/4	56-7/8	6-5/8	2	7	2	1-7/8	9	1-1/4	12	2750	8.3	336
G3 120-5-3 - PG0501203VM0143	120	6-1/4	56-7/8	6-5/8	2	7	2	1-7/8	9	1-1/4	12	2750	8.8	336
G3 130-5-3 - PG0501303VM0144	129-1/8	6-1/4	56-7/8	6-5/8	2	7	2	1-7/8	9	1-1/4	12	2750	9.2	336
G3 140-5-3 - PG0501403VM0114	139-5/16	6-1/4	60-1/4	6-5/8	2	7	2	1-7/8	9	1-1/4	12	2750	9.9	354
G3 150-5-4 - PG0501504VM0170	153-1/16	5-1/2	57-1/4	6-5/8	2	7	2	1-7/8	9	1-1/4	12	2750	10	361
G3 160-5-4 - PG0501604VM0169	160	5-1/2	57-1/4	6-5/8	2	7	2	1-7/8	9	1-1/4	12	2750	10.2	362
G3 170-5-4 - PG0501704VM0168	170	5-1/2	57-1/4	6-5/8	2	7	2	1-7/8	9	1-1/4	12	2750	10.5	362
G3 - 5.7" MODEL (replaces M 6-1/2")														
G3 135-5.7-3 - PG0571353VM0147	133-11/16	7-5/8	59-11/16	7-1/2	2	8	2	2-1/4	10-3/16	1-1/2	16	2750	13.1	437
G3 145-5.7-3 - PG0571453VM0220	145-5/8	6-1/2	63-5/16	7-1/2	2	8	2	2-1/4	10-3/16	1-1/2	16	2750	14.2	465
G3 150-5.7-4 - PG0571504VM0148	150	7-5/8	59-7/16	7-1/2	2	8	2	2-1/4	10-3/16	1-1/2	16	2750	13.8	472
G3 160-5.7-4 - PG0571604VM0149	160	7-5/8	59-7/16	7-1/2	2	8	2	2-1/4	10-3/16	1-1/2	16	2750	14.3	472
G3 170-5.7-4 - PG0571704VM0150	170	7-5/8	59-7/16	7-1/2	2	8	2	2-1/4	10-3/16	1-1/2	16	2750	14.8	472
G3 180-5.7-4 - PG0571804VM0115	179-7/16	7-5/8	59-7/16	7-1/2	2	8	2	2-1/4	10-3/16	1-1/2	16	2750	15.2	472
G3 216-5.7-5 - PG0571804VM0115	216-5/8	7-5/8	57-7/8	7-1/2	2	8	2	2-1/4	10-3/16	1-1/2	16	1750	16	485
G3 - 6.7" MODEL (replaces M 7-1/2")														
G3 175-6.7-4 - PG0671754VM0181	175	9-5/8	64-3/8	8-1/2	2-1/2	9	2	2-1/4	12	1-1/2	16	2750	21	648
G3 185-6.7-4 - PG0671854VM0154	185	9-5/8	64-3/8	8-1/2	2-1/2	9	2	2-1/4	12	1-1/2	16	2750	21.6	648
G3 195-6.7-4 - PG0671954VM0130	194-1/16	9-5/8	64-3/8	8-1/2	2-1/2	9	2	2-1/4	12	1-1/2	16	2750	22.5	648
G3 - 6.7" MODEL (replaces M 7")														
G3 172-6.7-4 - PG0671754VM0182	175	9-5/8	64-3/8	8-1/2	2-1/2	9	2	2-1/4	11-3/16	1-1/2	16	2750	21	648
G3 182-6.7-4 - PG0671854VM0174	185	9-5/8	64-3/8	8-1/2	2-1/2	9	2	2-1/4	11-3/16	1-1/2	16	2750	21.6	648
G3 194-6.7-4 - PG0671954VM0175	194-1/16	9-5/8	64-3/8	8-1/2	2-1/2	9	2	2-1/4	11-3/16	1-1/2	16	2750	22.5	648

Subject to change without notice

G3A0219P